



CHINA LOONG
AGRICULTURAL MACHINES

China Loong Agricultural Machines Co., Ltd

Eagricultural-machines.com



CHINA LOONG
AGRICULTURAL MACHINES

China Loong Agricultural Machines Co., Ltd




science and technology changes life




China Loong
Agricultural
Machines Co., Ltd

CATALOGUE

01	地 钻 EARTH AUGER	01
02	割草机 BRUSH CUTTER	09
03	绿篱机 HEDGE TRIMMER	17
04	油 锯 CHAIN SAW	18
05	草坪机 LAWN MOWER	19
06	剪草机 SCYTHE MOWER	22
07	微耕机 TILLER	23
08	水 泵 WATER PUMP	26
09	吹吸机 BLOWER	27
10	喷粉机 MIST DUSTER	29
11	劈木机 LOG SPLITTER	32
12	碎枝机 WOOD CHIPPER	33
13	树根机 STUMP GRINDER	34
14	开沟机 TRENCHER	35
15	电动工具 ELECTRIC TOOLS	36
16	播种机 PLANTER	41
17	配件 ACCESSORIES	43



EARTHAUGER




EARTHAUGER



JP-DZS65

Engine Type:1E48F Air cooled,2-stroke engine
 Displacement:63cc
 power:2.5KW/9000rpm
 Suitable bits diameter: 40MM TO 300MM

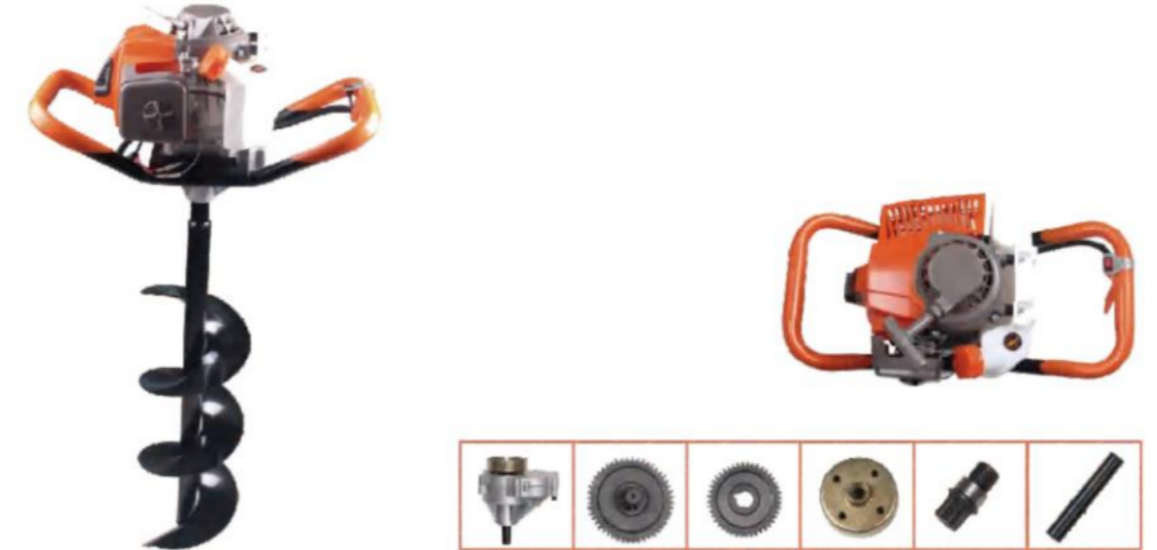

JP-DZ65-1

Engine Type:1E48F Air cooled,2-stroke engine
 Displacement:63cc
 power:2.5KW/9000rpm
 Suitable bits diameter: 40MM TO 300MM



JP-DZ001

Engine Type:1E44F Air cooled,2-stroke engine
 Displacement:45cc/52cc
 power:2.0KW/9000rpm
 Suitable bits diameter: 40MM TO 200MM



JP-DZ008

Engine Type:1E44F Air cooled,2-stroke engine
 Displacement:45cc/52cc
 power:2.0KW/9000rpm
 Suitable bits diameter: 40MM TO 200MM



EARTHAUGER



EARTHAUGER



JP-DZ001

Engine Type:1E44F Air cooled,2-stroke engine
 Displacement:45cc/52cc
 power:2KW/9000rpm
 Suitable bits diameter: 40MM TO 200MM



JP-DZ009-1

Engine Type:1E44F /1E48F Air cooled,2-stroke engine
 Displacement:45cc/52cc/63cc
 power:2.0KW/9000rpm
 Suitable bits diameter: 40MM TO 200MM (45cc/52cc)
 Suitable bits diameter: 40MM TO 300MM (63cc)



JP-DZ023

Engine Type: Air cooled,4-stroke engine
 Displacement:196CC
 power: 6.5 KW/9000rpm
 Suitable bits diameter: 40MM TO 500MM





EARTHAUGER



EARTHAUGER



JP-ER01A

Engine Type:1E44F/48F Air cooled,2-stroke engine
 Displacement:45cc/52cc/63CC
 power:2.0KW/9000rpm
 Suitable bits diameter: 40MM TO 200MM(45CC/52CC)
 40MM TO 300MM(63CC)



JP-ER02A

Engine Type:1P75F Air cooled,4-stroke engine
 Displacement:224cc
 power:9.5KW/3800rpm
 Suitable bits diameter: 40MM TO 600MM














JP-DZH52/H63

Engine Type:1E44F/48F Air cooled,2-stroke engine
 Displacement:45cc/52cc/63CC
 power:2.0KW/9000rpm
 Suitable bits diameter: 40MM TO 200MM(45CC/52CC)
 40MM TO 300MM(63CC)



HANDLE BAR

 HB01	 HB02	 HB03
 HB04	 HB05	 HB06
 HB07	 HB08	 HB09
 HB10		 HB11

GEAR BOX



 GB01	 GB196	 GB03	 GB04	 GB05
---	--	---	---	---




DRILL BITS



DRILL BITS

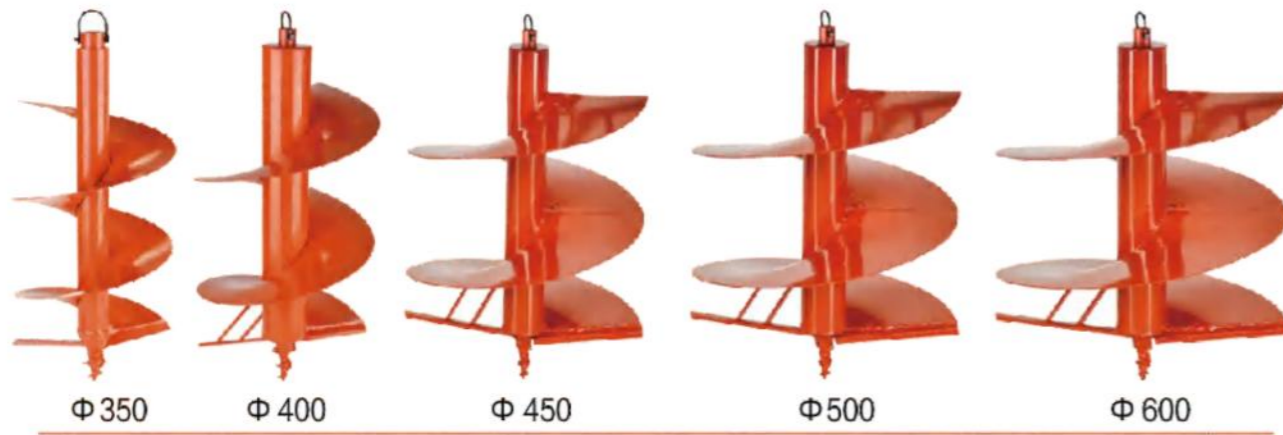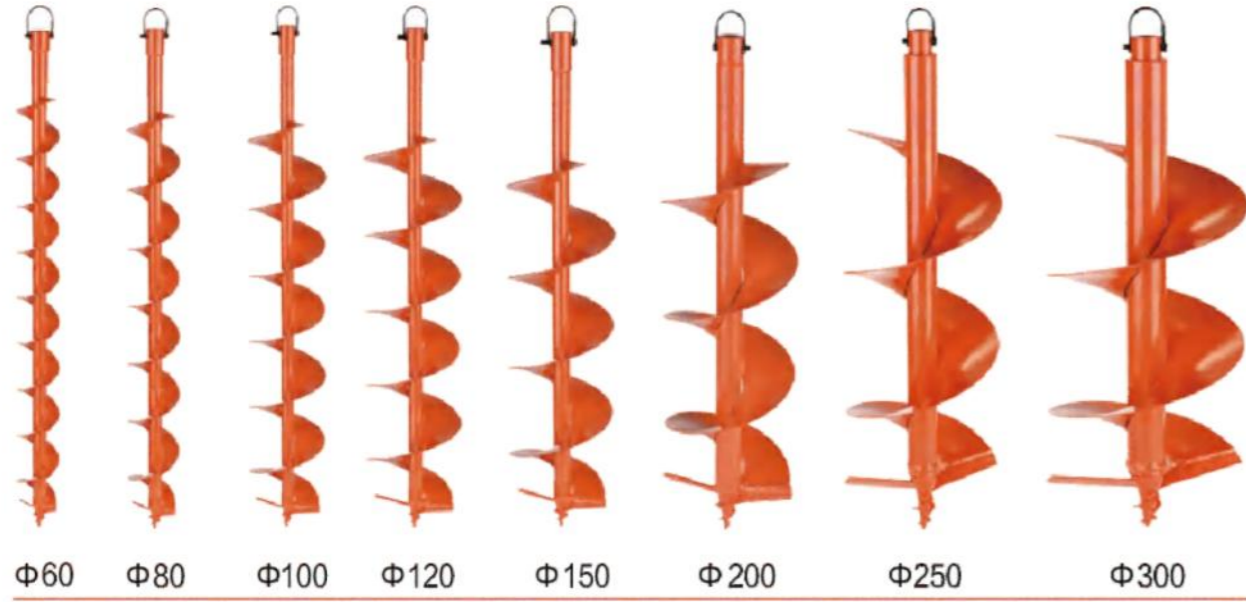

ICE DRILL BITS

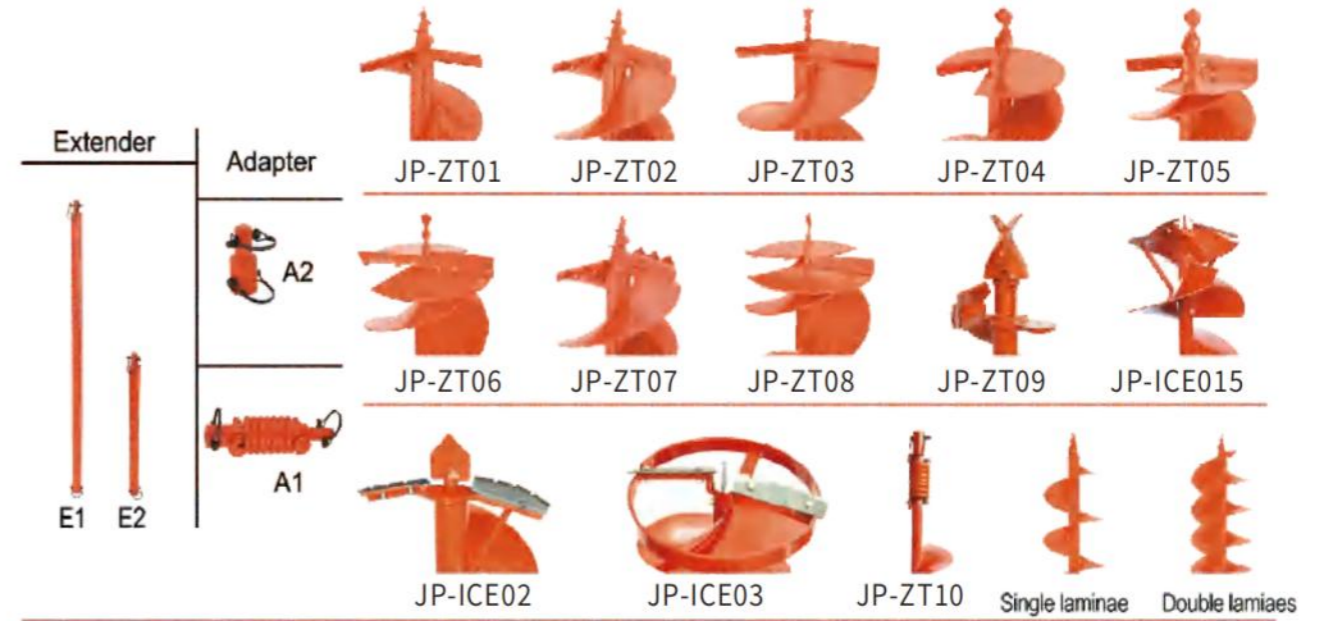



MULTI-FUNCTION BRUSH CUTTER



MULTI-FUNCTION BRUSH CUTTER

MODEL:MF52
 Displacement: 43cc/52cc
 Engine: 1E44F-6,2-stroke,single cylinder gasoline
 Rated output Power: 1.90kW/6500rpm





BRUSH CUTTER



BRUSH CUTTER



2600



40-5B



411A-1



520B



4300/5200-3



4300/5200-1



520HS



48F



328



Gx35



139HS



139ZS



Tu26



EG035A



TJ35E



1E144



BRUSH CUTTER



JP-B411(U-BAR02)

Displacement: 40.2cc
Engine: 1E40F-6,2-stroke,single cylinder gasoline
Rated output Power: 1.10kW/6500rpm
2-cycle oil/gasoline mixing ratio: 1:25
Ignition: C.D.I
Start system: recoil
Carburetor:Float type
Fuel tank capacity: 0.85L
Blade: Nylon cutter or Matal blade

JP-1E40FA(U-BAR01)

Displacement: 37.68cc
Engine: 1E40F,4-stroke,single cylinder gasoline
Rated output Power: 1.0kW/6500rpm
Ignition: C.D.I
Start system: recoil
Fuel tank capacity: 0.65L
Oil tank capacity:80ml
Blade: Nylon cutter or Matal blade



BRUSH CUTTER



JP-B520A(D-BAR)

Displacement: 52cc
Engine: 1E44F-6,2-stroke,single cylinder gasoline
Rated output Power: 1.90kW/6500rpm
2-cycle oil/gasoline mixing ratio: 1:25
Ignition: C.D.I
Start system: recoil
Fuel tank capacity: 1.2L
Blade: Nylon cutter or Matal blade

JP-B520B(W-BAR)

Displacement: 52cc
Engine: 1E44F-6,2-stroke,single cylinder gasoline
Rated output Power: 1.90kW/6500rpm
2-cycle oil/gasoline mixing ratio: 1:25
Ignition: C.D.I
Start system: recoil
Carburetor:Diaphragm type
Fuel tank capacity: 1.2L
Blade: Nylon cutter or Matal blade



BRUSH CUTTER/BACKPACK



JP-BP140

Displacement: 37.68cc
 Engine: 1E40F,4-stroke,single cylinder gasoline
 Rated output Power: 1.0kW/6500rpm
 Ignition: C.D.I
 Start system: recoil
 Carburetor:Diaphragm type
 Fuel tank capacity: 0.65L
 Blade: Nylon cutter or Matal blade



BRUSH CUTTER/BACKPACK



JP-ST520A

Displacement: 52cc
 Engine: 1E44F-6,2-stroke,single cylinder gasoline
 Rated output Power: 1.9kW/6500rpm
 Ignition: C.D.I
 Start system: recoil
 Carburetor:Diaphragm type
 Fuel tank capacity: 1.2L
 Blade: Nylon cutter or Matal blade



JP-520A

Displacement: 52cc
 Engine: 1E44F-5,2-stroke,single cylinder gasoline
 Rated output Power: 1.9kW/6500rpm
 Ignition: C.D.I
 Start system: recoil
 Carburetor:Diaphragm type
 Fuel tank capacity: 1.2L
 Blade: Nylon cutter or Matal blade



JP-520B

Displacement: 52cc
 Engine: 1E44F-5,2-stroke,single cylinder gasoline
 Rated output Power: 1.9kW/6500rpm
 Ignition: C.D.I
 Start system: recoil
 Carburetor:Diaphragm type
 Fuel tank capacity: 1.2L
 Blade: Nylon cutter or Matal blade



JP-ST520B

Displacement: 52cc
 Engine: 1E44F-6,2-stroke,single cylinder gasoline
 Rated output Power: 1.9kW/6500rpm
 Ignition: C.D.I
 Start system: recoil
 Carburetor:Diaphragm type
 Fuel tank capacity: 1.2L
 Blade: Nylon cutter or Matal blade





HEDGE TRIMMER




JP-H003



JP-H002



180°

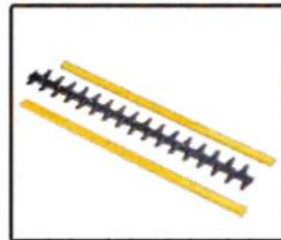

Engine: 2-stroke air-cooled 1cylinder
 Displacement: 23cc
 Max. power: 650W
 Blade length: 600mm
 Oil tank capacity: 0.31L
 Fuel Tank Capacity : 25:1 /0.5L



CHAIN SAW



MODEL:5200

Displacement:52cc
 Rated Output Power:2.2kw
 Max.Cutting Dia:20"
 Fuel tank capacity:0.52L /Oil tank:0.26L



MODEL:5800

Engine: 2-stroke air-cooled
 Displacement:58cc
 Rated Output Power:2.4kw
 Max.Cutting Dia:22" /24"
 Fuel tank capacity:0.52L /Oil tank:0.26L
 Two-cycle oil/Gasoling Mixing Ratio: 1:25



MODEL:2600

Displacement:25.4cc
 Rated Output Power:0.9kw
 Max.Cutting Dia:10" /12"
 Fuel tank capacity:0.31L /Oil tank:0.21L
 Two-cycle oil/Gasoling Mixing Ratio: 1:25



MODEL:3800

Displacement:37.2cc
 Rated Output Power:1.2kw
 Max.Cutting Dia:16"
 Fuel tank capacity:0.31L /Oil tank:0.21L
 Two-cycle oil/Gasoling Mixing Ratio: 1:25



LAWN MOWER



MODEL:JP-168-1HC

Engine type:Single cylinder, air-forced cool,4 stroke
Engine model:M1P61FA
Max power:3.5HP
Displacement:123cc
Start way :Recoil
Drive type : hand push
Idle speed:2800rpm
Cutting width:460mm(18inch)
Cuting height:25-70mm,5adjustment
Height adjustment:1 level adjustment
Wheel Diameter:Front : 6inch, Rear:6inch
Fuel tank capacity:1.3L
Grass bag capacity :Side discharge
Deck :Metal



LAWN MOWER

Engine type:Single cylinder, air-forced cool,4 stroke
Engine model:M1P65FA
Max power:5.0HP
Displacement:139cc
Start way :Recoil
Drive type :Self-propelled
Idle speed:2750rpm
Cutting width:510mm(20inch)
Cuting height:30-80mm,8adjustment
Height adjustment:1 level adjustment
Wheel Diameter:Front : 7inch, Rear:11inch
Fuel tank capacity:1.3L
Grass bag capacity :60L
Deck :Metal



MODEL: JP-M178-2A

Engine type:Single cylinder, air-forced cool,4 stroke
Engine model:M1P61FA
Max power:3.5HP
Displacement:123cc
Start way :Recoil
Drive type :self-propelled
Idle speed:2800rpm
Cutting width:400mm(16inch)
Cuting height:15-65mm,10adjustment
Height adjustment:1 level adjustment
Wheel Diameter:Front : 7inch, Rear:8inch
Fuel tank capacity:1.3L
Grass bag capacity :40L
Deck :Metal



MODEL:JP-M158-1C



MODEL:JP-M188-2AJ4 IN 1

Engine type:Single cylinder, air-forced cool,4 stroke
Engine model:M1P70FA
Max power:6.0HP
Displacement:173cc
Start way :Recoil
Drive type :self-propelled 4 IN 1 with mulching
Idle speed:2750rpm
Cutting width:560mm(22inch)
Cuting height:30-90mm,8adjustment
Height adjustment:1 level adjustment
Wheel Diameter:Front : 7inch, Rear:11inch
Fuel tank capacity:1.5L
Grass bag capacity :65L
Deck :Metal



LAWN MOWER ENGING



B&S 450E
MAX POWER:2.6HP



B&S 500E
MAX POWER:2.9HP



B&S 750EX
MAX POWER:3.7HP



GXV 160 HONDA
MAX POWER:5.5HP



SCYTHE GRASS CUTTER



MODEL:JP-SM001G

- Gear Shifts: one forward, one neutral, one backward
- Running rubber wheel :500-6
- Clutch mode Belt tension type
- Cutting width 800mm/900mm/1200mm
- Cutting height 10-80mm
- Engine 170F-P
- Displacement: 212cc
- Max Power: 6.5HP/4000r/min
- Speed Rate: 30:1
- Torque: 13N
- Drive Speed: 1.84-3.88km/h for forward and 1.6km/h for reverse
- Fuel Type: Unleaded Gasoline

MODEL:JP-SM002D

- Gear Shifts: one forward, one neutral, one backward
- Running rubber wheel :500-6
- Clutch mode Belt tension type
- Cutting width 800mm/900mm/1200mm
- Cutting height 10-80mm
- Engine 173FA
- Displacement: 247cc
- Max Power: 5.2HP/4000r/min
- Speed Rate: 30:1
- Torque: 13N
- Drive Speed: 1.84-3.88km/h for forward and 1.6km/h for reverse
- Fuel Type: DIESEL





GASOLINE TILLER



TILLER HEAD



MODEL:JP-T7101

Displacement: 71cc
 Engine: 2-stroke, single cylinder gasoline
 Rated output Power: 2.5kW/6500rpm
 Ignition: C.D.I
 Start system: recoil
 Carburetor: Diaphragm type
 Fuel tank capacity: 1.2L
 Tilling Width: 30CM
 Tilling Depth: 20-25cm



MODEL:JP-T5202

Displacement: 52cc
 Engine: 1E44F-6, 2-stroke, single cylinder gasoline
 Rated output Power: 1.9kW/6500rpm
 Ignition: C.D.I
 Start system: recoil
 Carburetor: Diaphragm type
 Fuel tank capacity: 1.2L
 Tilling Width: 30CM
 Tilling Depth: 20-25cm



TH01



TH02



TH03



TH04



TH05



TH06



TH07



TH08



TH09



TH10



TH11



TH12





TILLER



WATER PUMP

GASOLINE/DIESEL TILLER



GASOLINE TILLER
JP-901G



DIESEL TILLER
JP-901D



MODEL	JP-901	JP-901 -1
Tilling Width:	500mm/700mm	500mm~700mm
Tilling Depth:	175~350mm	175~350mm
Gear Shifting:	1/0/-1	1/0/-1
Engine Type:	Gasoline OHV 4-stroke	Diesel Engine 178F
Displacement:	212cc	296cc
Max Output:	7.5HP/3600rpm	7.5HP/3600rpm
Fuel Tank Capacity:	3.6L	3.5L
Oil Capacity:	0.6L	1 L
Starting system:	Recoil start	Recoil start / Electric start
Fuel Type:	Unleaded Gasoline	0#&-10 Diesel
G.WIN.W.:	75/65kg	85/75kg
Meas:	112*51*46cm	120*60*65cm
Qty:	20'GP:108PCS/40'HQ: 229PCS	



JP-WP26

Displacement: 52cc
Engine: 1E44F-5,2-stroke,single cylinder gasoline
Rated output Power: 1.9kW/6500rpm
Inlet/outlet dia.:1"(25.4mm)
Max delivery lift:H max 30m
Max flow:13m ³ /h



JP-WP140

Displacement: 37.68cc
Engine: 1E40F,4-stroke,single cylinder gasoline
Rated output Power: 1.0kW/6500rpm
Inlet/outlet dia.:1"(25.4mm)
Max delivery lift:H max 25m
Max flow:8m ³ /h



JP-WP50

Displacement: 163cc
Engine: 168F,4-stroke,single cylinder gasoline
Rated output Power: 5.5HP/6500rp
Inlet/outlet dia.:2"(50.00mm)
Max delivery lift:H max 25m
Max flow:30m ³ /h



BLOWER



BLOWER



JP-808A

Engine	1E44F-2A
Displacement(cc)	51.7
Power (kw/r/min)	1.4/7000
Average air volume(m ³ /s)	0.2
Fuel tank (ml)	1300
N.WIG.W (kg)	8.5/10
Packing (mm)	430*390*460
20GP Container	390
40Hg Container	800



JP-809A



JP-LBV001

Displacement:51.7cc



JP-LB002

Displacement:51.7cc



JP-EB950

Displacement:63.3cc



JP-LB004(4 STROKE)

Displacement:75.6cc



JP-EB8690

Displacement:63.3cc



JP-EB8850

Displacement:75.6cc



JP-EB8890

Displacement:75.6cc



JP-EB8890A

Displacement:75.6cc



MIST DUSTER



3WF-750(14L/20L)

Engine	1E40FP-3Z
Displacement(cc)	41.5
Power (kw/r/min)	2.13/7500
Fuel tank (ml)	1400
N.WIG.W (kg)	10.5/14
Packing (mm)	490*410*690/740
20# Container	205/190
40Hg Container	495/460



3WF18-3(12L)

Engine	1E40F
Displacement (cc)	50.3
Power (kw/r/min)	1.31/5500
Fuel tank (ml)	1600
N.WIG.W (kg)	10.3/14
Packing (mm)	510*430*675
20#Container	200
40Hg Container	350



3WF18-9(14L/20L)

Engine	1E40FA
Displacement(cc)	50.3
Power (kw/r/min)	1.31/5500
Fuel tank (ml)	1400
N.WIG.W (kg)	11.5/14.5
Packing (mm)	550*440*725/775
20# Container	165/150
40Hg Container	400/380



3WF-3S(14L/20L/26L)

Engine	140FA
Displacement (cc)	37.7
Power (kw/r/min)	1.0/6500
Fuel tank (ml)	600
N.WIG.w (kg)	10.5/13.5
Packing (mm)	520*440*725/770/825
20# Container	171/161/150
40Hg Container	410/385/360



POWER SPRAYER



3WZ-6

Engine	1E34F
Displacement (cc)	25.4
Power (kw/r/min)	0.75/7500
Fuel tank (ml)	700
N.WIG.W (kg)	9.0/12
Packing (mm)	425*370*590/435*370*630/470*370*675
20#Container	305/280/240
40Hg Container	738/675/583



3WZS-7

Engine	140FA
Displacement (cc)	38
Power (kw/r/min)	1/6500
Fuel tank (ml)	600
N.WIG.W (kg)	10.5/13.5
Packing (mm)	470*400*700
20#Container	215
40Hg Container	520

3WZS-6

Engine	139F
Displacement (cc)	31
Power (kw/r/min)	0.7/6500
Fuel tank (ml)	700
N.WIG.W (kg)	11.0/14
Packing (mm)	440*435*590/440*435*630/470*440*675
20#Container	250/235/204
40Hg Container	605/565/490





ELECTRIC SPRAYER



3WD-20

Tank Capacity(L)	20
Battery	DC12V18AH(10AH, 12AH)
Membrane Pump	DC12V12.1A
Working Plessure(MPA)	0.15-0.4
Max Flow(L/MIN)	2.6
N.WIG.W (kg)	7.5/9
Packing (mm)	415*270*525
20# CONTAINER	470
40HQ CONTAINER	1150



LOG SPLITTER



MODEL:JP-GL34T

ENGINE:6.5HP FOUR STROKES
WEDGE HEIGHT:200MM
LOAD CAPACITY :LENGTH:610MM DIAMETERE:750MM
TIRE:6.5-8 CYCLE TIME :3SECONDS
H-BEAM HEIGHT :710MM
OVER HEIGHT:970MM
OVER LENGTH:2110MM
WIDTH:840MM
SPROCKET RATE:1:6
FLYWHEEL MAX RPM:300



MODEL:JP-GL22B/26B

Product name:log splitter
ENGINE:6.5HP four stroke
PUMP:8GAL TWO STAGE PUMP
RAM DIAMETER:4.0INCH
RAM TRAVEL:610MM
CONTROL VALVE:100L AUTO-RETURN
MAX FORCE:22TON/26TON
TIRE:6.5-8INCH



WOOD CHIPPER



STUMP GRINDER



JP-S001

ENGINE:7HP/13HP/15HP GASOLINE
STARTING SYSTEM: RECOIL START OR ELECTRIC START

JP-WS65

ENGINE:6.5HP
Chipping Capacity: 100mm



JP-GS-15H

ENGINE:15HP
Chipping Capacity: 120MM



JP-SG-15

ENGINE : Petrol/Gas, Four Strokes
HorsePower: 15HP
The Qty of Teeth : 9pcs
Width of the machine: 750mm
Diameter of Cutting Wheel: 300mm
Cutting Wheel Thickness: 90mm
Cutter Depth Below Ground: 235mm
Cutter Depth Above Ground: 600mm
Belt: Two Pieces V Belt
Brake: Drum Brake






TRENCHER

JP-TR15

Engine: 7HP OR 15HP
Blade: 21 carbide alloy blades/Blade: 27 carbide alloy blades
Chain length: 1600mm/2060MM
Chain speed: 550m/min / 550m/min
Trench width:100mm
Trench depth:150,250,340,450mm/200,400,600mm



ELECTRIC BRUSH CUTTER



1、 POLE SAW
bar size 8"
chain pitch 3/8"
max rpm : 9000min-1
total length:
1700-2200MM
shipping dimensions:
106*19*10CM



2、 HEDGE TRIMMER
blade length: 410MM
max cutting diameter:
24mm
max rpm : 1500min-1
total length:
2000-2700MM
shipping dimensions:
106*19*10CM

Model:JP-900
Mains voltage:230V/50HZ
Power:900W




3、 BRUSH CUTTER
cutting diameter:
230mm
bore:25.4mm
shipping dimensions:
106*19*10CM



4、 NYLON CUTTER
cutting diameter:
480mm
shipping dimensions:
106*19*10CM



Always use the shoulder strap when using the tool to avoid serious personal injury.






ELECTRIC TOOL



JP--LBC108

Rated voltage:	18V/3.0Ah
Rated power:	850W
Guide plate size:	8"
Idle speed:	3800r/min
Qty:	2pcs
Packing:	54.5X53X51CM



JP--LBC109

Rated voltage:	21V/4.0Ah
Rated power:	600W
Guide plate size:	8"
Idle speed:	3500r/min
Qty:	5pcs
Packing:	25.5X39X31CM



JP--LBC107

Rated voltage/Batter capa:	18V/2.0Ah
Power:	550W
Guide plate size:	4"
Idle speed:	3500r/min
Chain type:	1/4" (6.35)
Max. cutting length:	100mm



JP--LBC102

Rated voltage:	21V/3.0Ah
Rated power:	850W
Guide plate size:	10"
Idle speed:	5800r/min
Qty:	5pcs/
Packing:	25.5X39X31CM



JP--LBC105

Rated voltage:	21V/3.0Ah
Rated power:	500W
Guide plate size:	8"
Idle speed:	5800r/min
Qty:	5pcs
Packing:	25.5X39X31CM



JP--F30

Rated voltage:	21V
Power:	600W
Pruning diameter:	30mm
Battery parameters:	21V/10C12.0Ah
charger:	450MA
Boxed configuration:	Two batteries and one charge
Plastic box size:	35.5X34X10.5CM
Packing size:	53.5X36.5X35CM(5PCS)



ELECTRIC TOOL



JP--LBB201

Rated voltage/Battery capa:	12V/3Ah
Power:	800W
Max cutting diameter:	150mm
Working time:	2H/Battery charge time: 1H
Annex:	1Xcharger/repair tools 2Xmetal blade 5xplastic blade
Feature:	2 batteries 3AH 21V
Packing:	Kraft carton
Idle speed:	1800r/min
N.WIG.W:	1.3kg/2.0kg
Packing size:	89x14.7x14.9cm



JP--LBB203

Rated voltage/Battery capa:	21V/3Ah
Power:	800W
Max cutting diameter:	150mm
Working time:	30 mins
Annex:	1Xlithium battery/1Xcharger/repair tools 2Xmetal blade 5xplastic blade
Feature:	With LED power display
Packing:	Kraft carton
Idle speed:	1800r/min
N.WIG.W:	1.8kg/2.5kg
Packing size:	89x14.7x14.9cm



JP--LBB205

Rated voltage/Battery capa:	21V/3Ah
Power:	1200W
Max cutting diameter:	150mm
Working time:	30 mins
Annex:	1Xlithium battery and 1charger
Packing:	Kraft carton
Idle speed:	1800r/min
N.WIG.W:	1.8kg/2.5kg
Packing size:	89x14.7x14.9cm



JP--LBB202

Rated voltage/Battery capa:	21V/3A
Power:	800W
Max cutting diameter:	150MM
Working time:	2H/Battery charge time: 1H
Annex:	2xLithium battery and 1xcharger / repair tools/2xMetal blade and 5xplastic blade



MULTI-FUNCTION ELECTRIC HAMMER



ELECTRIC PICK

32mm ELECTRIC HAMMER 3008A



INPUT POWER	1450W
INPUT VOLTAGE	110V/60Hz 220V/50Hz
NO-LOAD SPEED	850rpm
ROTARY FREQUENCY	4400bpm
TYPE	SDS-PLUS
IMPACT ENERGY	7J
G.W / N.W	33kg/32kg
CARTON SIZE /QTY	54.5x46.5x38.5cm/4pcs

32mm ELECTRIC HAMMER 3008B



INPUT POWER	1450W
INPUT VOLTAGE	110V/60Hz 220V/50Hz
NO-LOAD SPEED	850rpm
ROTARY FREQUENCY	4400bpm
TYPE	SDS-MAX
IMPACT ENERGY	12J
G.W / N.W	35.5kg/34kg
CARTON SIZE /QTY	52.5x28x40cm/2pcs

32mm ELECTRIC HAMMER 3003



INPUT POWER	1500W
INPUT VOLTAGE	110V/60Hz 220V/50Hz
NO-LOAD SPEED	850rpm
ROTARY FREQUENCY	4400bpm
TYPE	SDS-PLUS
IMPACT ENERGY	7J
G.W / N.W	33.9kg/33kg
CARTON SIZE /QTY	54.5x46.5x38.5cm/4pcs

40mm ELECTRIC HAMMER 3015



INPUT POWER	1850W
INPUT VOLTAGE	110V/60Hz 220V/50Hz
NO-LOAD SPEED	850rpm
ROTARY FREQUENCY	3750bpm
TYPE	SDS-MAX
IMPACT ENERGY	20J
G.W / N.W	23.39kg/22.8kg
CARTON SIZE /QTY	52.5x28x40cm/2pcs

32mm ELECTRIC HAMMER 3017B



INPUT POWER	1580W
INPUT VOLTAGE	110V/60Hz 220V/50Hz
NO-LOAD SPEED	850rpm
ROTARY FREQUENCY	4400bpm
TYPE	SDS-MAX
IMPACT ENERGY	12J
G.W / N.W	37.2kg/36kg
CARTON SIZE /QTY	52.5x28x40cm/2pcs

26mm ELECTRIC HAMMER 326



INPUT POWER	1000W
INPUT VOLTAGE	110V/60Hz 220V/50Hz
NO-LOAD SPEED	620rpm
ROTARY FREQUENCY	4500bpm
TYPE	SDS-PLUS
IMPACT ENERGY	5J
G.W / N.W	26.9kg/25.8kg
CARTON SIZE /QTY	61.5x40.5x30.5cm/5pcs

HEX30 ELECTRIC PICK 3061



INPUT POWER	1850W
INPUT VOLTAGE	110V/60Hz 220V/50Hz
ROTARY FREQUENCY	1900bpm
TYPE	HEX 30
IMPACT ENERGY	45J
G.W / N.W	20.46kg/19.5kg
CARTON SIZE /QTY	71x17x29cm/1pcs



SDS-MAX ELECTRIC PICK 3065



INPUT POWER	1800W
INPUT VOLTAGE	110V/60Hz 220V/50Hz
ROTARY FREQUENCY	1900bpm
TYPE	SDS-MAX
IMPACT ENERGY	58J
G.W / N.W	20.2kg/18.7kg
CARTON SIZE /QTY	81.5x17x37cm/1pcs



HEX30 ELECTRIC PICK 3066



INPUT POWER	1800W
INPUT VOLTAGE	110V/60Hz 220V/50Hz
ROTARY FREQUENCY	1900bpm
TYPE	HEX 30
IMPACT ENERGY	45J
G.W / N.W	18.3kg/17.5kg
CARTON SIZE /QTY	71x17x29cm/1pcs



HEX30 ELECTRIC PICK 3125



INPUT POWER	1900W
INPUT VOLTAGE	110V/60Hz 220V/50Hz
ROTARY FREQUENCY	1900bpm
TYPE	HEX30
IMPACT ENERGY	50J
G.W / N.W	22.78kg/22kg
CARTON SIZE /QTY	81.5x17x37cm/1pcs





PLANTER



GARLIC PLANTER

Model	Unit	WTDS-5	RYDS-4	RYDS-6	RYDS-9	RYDS-11
Seeding rows	row	5	4	6	9	11
Matched Tractor	hp	10-12	20-50	20-50	25-55	30-60
Productivity	hah	0.13-0.18	0.13-0.18	0.18-0.25	0.25-0.33	0.27-0.35
Row spacing	mm	180-200 adjustable				
Seed distance	mm	70-180 adjustable				
Seeding depth	mm	40-150 adjustable				
Linkage	/	Walkina tractor rearsuspension	Three-pointed mounted			



POTATO PLANTER

Model	Unit	RY2CM-2	RY2CM-2A	RY2CMMF-2A	RY2CM-4
Dimensions	mm	2320*1360*1380	RY2CM-2A	480*1800*1380	1700*1600*1600
Weight	kg	320	2600*1600*1400	43530-40	500
Mounted power	hp	25-40	43030-40	1600	40-75
Working width	mm	600-900	600-900	two ridge two rows	1600
Planting rows	/	one ridge two rows		700-800	two ridge four rows
Row spacing	mm	220-280	220-400	0.17-0.33	650-800
Working efficiency	ha/h	0.16-0.26	0.16-0.26	≥0.33	



PLANTER



CORN PLANTER

Model	Unit	RYCP-2	RYCP-3	RYCP-4	RYCP-5	RYCP-6	RYCP-7	RYCP-8
Seeding rows	rows	2	3	4	5	6	7	8
Row spacing	mm	500-750(can be customized)						
Plant distanae	mm	150-400						
Seedng depth	mm	30-50						
Fertilizer depth	/	30-100						
Type of drwe	mm	Chain transmission and Gear drive						
Matched poxrer	mm	18-30	20-40	30-60	50-80	70-120	90-120	100-120
Weight	kg	180	280	396	496	596	698	796
Lkage	/	3-pont mounted						



SEED PLANTER

Models	Unit	2BFX-9	2BFX-12	2BFX-14	2BFX-16	2BFX-18	2BFX-24
Seeding rows	row	9	12	14	16	18	24
Row spacing	mm	150					
Seeding depth	mm	10-80					
Fertilizer depth	mm	30-100					
Matched tractor	rp	25-45	30-60	40-70	50-80	60-90	70-100
Linkage	/	3-point mounted					






ACCESSORIES


Section shape of line



Colors of line

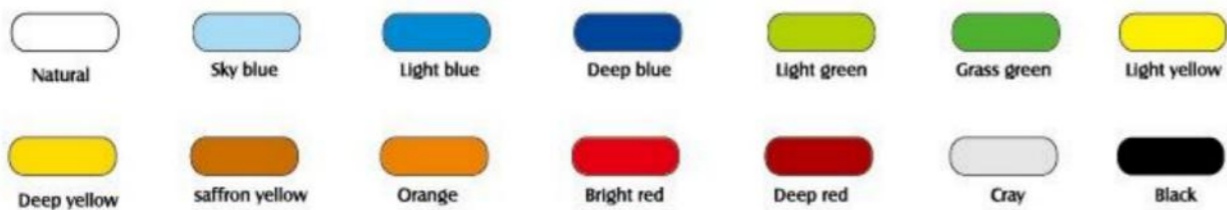

Shaped cutting performance:

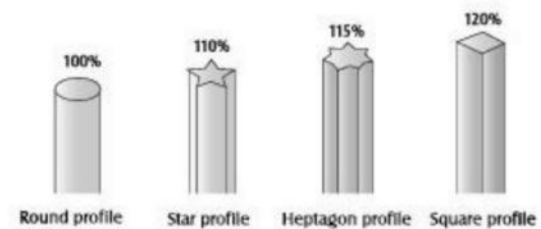

dB(A) Sound power lever



PACKAGE



ACCESSORIES



T001



T002



T003



T004



T006



T007



T008



T014



ACCESSORIES



T018



T39



T052



T035



T054



T032



A011



A015



ACCESSORIES



T043



F005



F003



F008



G008



G009




G010




G016




ACCESSORIES

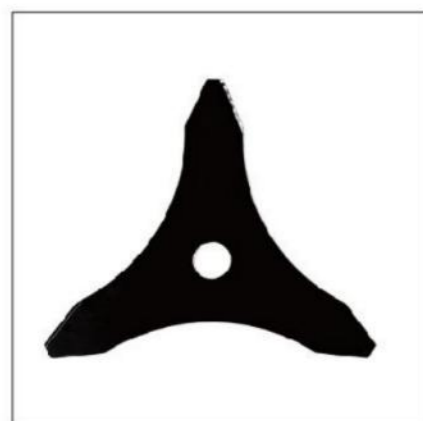

B007

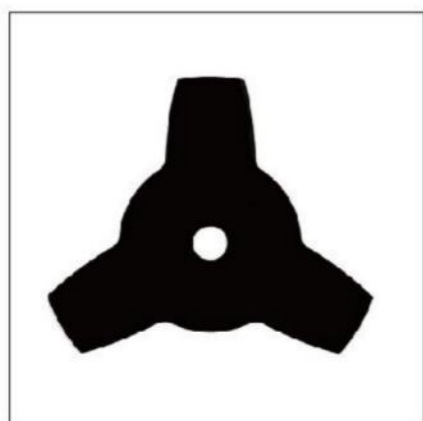

B008

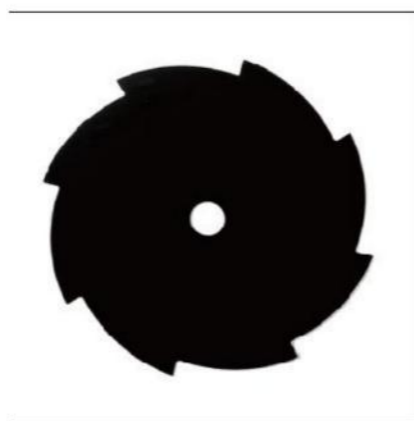

B011



40T-60T-80T



40T-60T-80T



H010



H006



H012



H007



ACCESSORIES



MS180



MS181



MS380



MS381



HU137



HU61



FS120



FS400



TL26



TL43



BG328



NB411



MS381-380



H51



FS120



FS85



328F



ST180



TS410-420



MS180ZAMA



MS660



H137



MS250



MS440



MS260



MS290



139F

China Loong Agricultural Machines Co., Ltd

agricultural-machines.com

